

# SEAMLESS FLOWING RESIN FLOORS

Polyurethane Comfort Flooring Systems






## PUR INDU COLOR

### Tough, Flexible and Smooth for Industrial and Retail Use

Tough enough for industrial use yet permanently flexible, this versatile self smoother – the workhorse in our range - can be used in many locations including mezzanine or raised floors and over good asphalt indoors\*. It is suitable for areas of heavy traffic or retail stores where high abrasion is expected from shoes, heels or castors. Like all Remmers PUR floor toppings the whole life cycle can be extended for many years with a

simple re-topping as the floor begins to wear. Expect to realise 15 years in industrial areas and up to 40 years with just pedestrian use. Colour stability can be maximised using highly UV stable top coats, which are available in a wide variety of gloss and texture levels. Use as a solid colour or a 50:50 blend to achieve the 'concrete look'.

Ask us for a proposal and quotation for your project today.

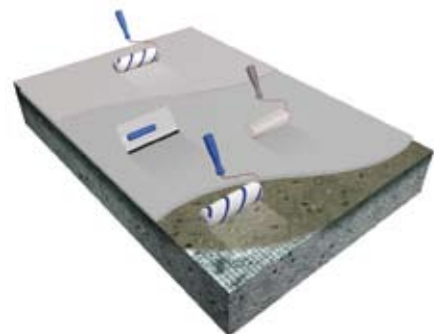

\* Always contact us for advice over asphalt



Step	Component	Information
<b>If required</b>	Rubber Crumb Underlay 3mm or 6mm grades	A recycled rubber acoustic underlay bonded to the subfloor with UN700PW adhesive and grouted with EG120 sealer. Then skip steps 1 and 2 below.
<b>1</b>	Epoxy FAS 100	Epoxy primer to give exceptional bond to common substrates. Other primers are available for different substrates.
<b>2</b>	PE Fleece	Used to 'scrim' across joints in secured timber floors – embed in epoxy primer.
<b>If required</b>	PUR Indu Color	A tough elastic 'scratch' coat to regulate and level the surface, which can be accelerated to suit conditions (temperature and waiting times).
<b>3</b>	PUR Indu Color	Semi-rigid self smoothing body coat with Shore Hardness of D60, applied at 1-2mm.
<b>If required</b>	Arti Top / Arti Color	Scratch resisting PUR clear or coloured sealer available with various gloss levels, with or without grip enhancing additive.




## PUR UNI COLOR

### Soft and Quiet for Retail, Commercial and Domestic Use

Using a softer, coloured polyurethane body coat, born from our sports flooring know-how, gives the extreme underfoot comfort associated with 'poured rubber' or 'liquid lino' flooring. With the addition of the rubber crumb underlay, not only foot comfort but also footfall noise and structure borne sound are reduced dramatically. Easy to clean and fully colour stable when using our extremely tough pigmented seal coats, these floors

are designed to last and last, reducing the long term maintenance costs associated with sheet or tiled floor coverings. Chemically inert, VOC free and capable of installation over almost any surface from glazed tiles\* or timber to concrete and screeds – even with under floor heating! Perfect for installation in wellness areas, gymnasiums, domestic, commercial and retail floor areas.

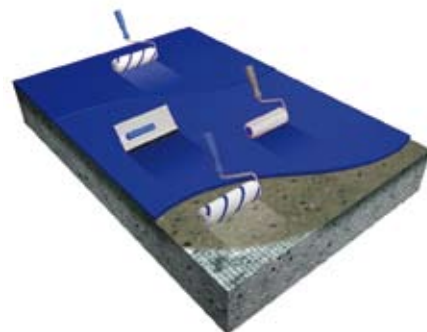

\* Always contact us to get the best advice



Step	Component	Information
<b>If required</b>	Rubber Crumb Underlay 3mm or 6mm grades	A recycled rubber acoustic underlay bonded to the subfloor with UN700PW adhesive and grouted with EG120 sealer. Then skip steps 1 and 2 below.
<b>1</b>	Epoxy FAS 100	Epoxy primer to give exceptional bond to common substrates. Other primers are available for different substrates.
<b>2</b>	PE Fleece	Used to 'scrim' across joints in secured timber floors – embed in epoxy primer.
<b>If required</b>	PUR Uni Color	An elastic 'scratch' coat to regulate and level the surface, which can be accelerated to suit conditions (temperature and waiting times).
<b>3</b>	PUR Uni Color	Soft feel self smoothing body coat with Shore Hardness of A80, applied at 2mm.
<b>4</b>	Arti Top / Arti Color	Scratch resisting PUR clear or coloured sealer available with various gloss levels, with or without grip enhancing additive.






## PUR DECO COLOR

### Luxurious Poured Rubber Flooring for Retail, Commercial and Domestic Use

The top of the range system offering complete colour stability and maximum foot comfort wherever it is used. Artistic designs can easily be formed into the floor allowing the installer complete freedom to produce bespoke and original emotion with the floor zone. All Remmers PUR systems benefit from the almost limitless choice of RAL and NCS colours and the possibility of matt, silk or gloss finish – with or without

our slip resisting additive - which does not compromise the cleanability of the floor. Expect to achieve up to 50 years service life with a floor of this quality when correctly maintained and sealed. Complex shapes can be formed as the topping is poured onto the floor and sets to form a visco-elastic finish. Foot comfort is maximised by using the rubber crumb underlay which gives the most luxurious finish, fit for a king.

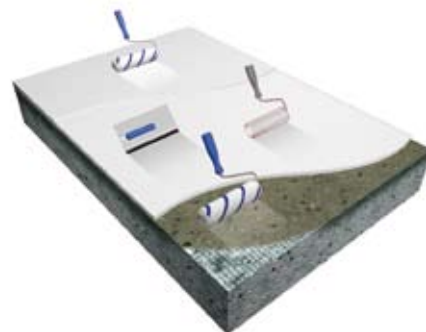

Step	Component	Information
<b>If required</b>	Rubber Crumb Underlay 3mm or 6mm grades	A recycled rubber acoustic underlay bonded to the subfloor with UN700PW and grouted with EG120. Then skip steps 1 and 2 below.
<b>1</b>	Epoxy FAS 100	Epoxy primer to give exceptional bond to common substrates. Other primers are available for different substrates.
<b>2</b>	PE Fleece	Used to 'scrim' across joints in secured timber floors – embed in epoxy primer.
<b>If required</b>	PUR Uni Color	An elastic 'scratch' coat to regulate and level the surface, which can be accelerated to suit conditions (temperature and waiting times).
<b>3</b>	PUR Deco Color	Soft feel self smoothing body coat with Shore Hardness of A80, applied at 2mm. Total UV light and colour stability.
<b>4</b>	Arti Top	Scratch resisting PUR sealer available with various gloss levels, with or without grip enhancing additive.



## REMMERS COLOUR COLLECTION FINISHES

The World is at Your Feet

All of our elastic PUR floors are available in a range of standard colours - but we believe in offering the most to our customers. That's why we don't limit you to this range. You can choose from almost any RAL or NCS colour and have these supplied at no extra cost for your flooring project.

Every floor also has the widest choice of finishes when you work with Remmers. Our range of seal coats is unrivalled and these are outlined below.



Base	Sealer	Information
<b>Solvent Free</b>	Arti Top	Single component 100% solids clear PUR with the highest order of scratch, stain and chemical resistance. Available in three gloss levels, all with or without our unique polymer bead grip enhancing finish.
<b>Solvent Free</b>	Arti Color	Add to your Arti Top sealer to give a coloured lightfast finish in almost any colour imaginable.
<b>Solvent Free</b>	PUR Color Top M /G	Solvent free, single component coloured PUR sealer available in a limited range of colours. Gloss or matt.
<b>Water Based</b>	PU 200 TM	Clear water based, two component, matt PUR sealer with excellent abrasion resistance.
<b>Water Based</b>	PU 100 CW ColorTop	Coloured water based, two component, matt PUR sealer with excellent abrasion resistance.
<b>Solvented</b>	PUR Top TX	Low solvent, two component PUR sealer with a slight 'orange peel' texture. Matt finish.

**Remmers (UK) Limited Crawley  
United Kingdom**

**Tel.: +44(0) 845 373 0103**

**Fax: +44(0) 845 373 0104**

**[www.remmers.co.uk](http://www.remmers.co.uk)**

**Remmers (Far East) Pte. Ltd.  
Singapore**

**Tel.: +65 6 7410277**

**Fax: +65 6 7417158**

